


Blouse



Sapphire 875 QUILT/855/835
EXCLUSIVE SENSOR SYSTEM

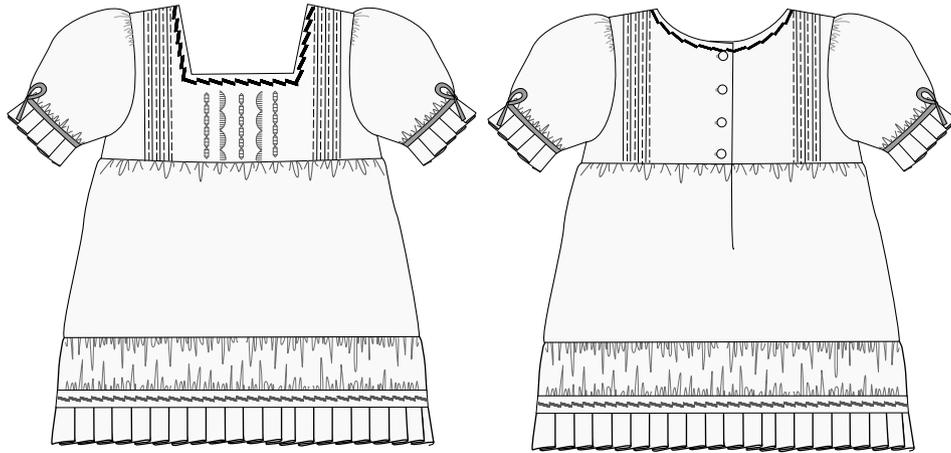

Sewing supplies

-  Burda pattern 9702, view B or 9775, view B
-  White cotton fabric (refer to pattern for yardage)
-  Interfacing (refer to pattern for yardage)
-  Sewing thread to match fabric
-  40 wt rayon embroidery thread
-  2 yards of 1/4" wide (6mm x 1.8m) blue silk ribbon.
-  1/2" (11mm) covered buttons

HUSQVARNA VIKING® Accessories

-  HUSQVARNA VIKING® SAPPHIRE™ 875 Quilt Sewing Machine
-  HUSQVARNA VIKING® HUSKYLOCK™ Overlock Machine
-  Open Toe Foot 412 80 09-45
-  Clear Seam Guide Foot 413 03 48-45
-  Edge Stitching Foot 412 79 67-45 or
-  Edge/Joining Foot 412 79 68-45
-  Gathering Foot 412 79 71-45
-  Ruffler 9200320-96

You can find these and many other accessories in the HUSQVARNA VIKING® Accessory User's Guide or on



our website www.husqvarnaviking.com, for purchase at your nearest HUSQVARNA VIKING® Dealer.

Seam allowance: Refer to sewing instructions in the pattern.

Cut out the pattern in the correct size.

Pattern changes

1. For the blouse, we have used a dress pattern. To adapt the pattern for a blouse:
2. Shorten the front and back yoke to 7/8" (2 cm) below the armhole.

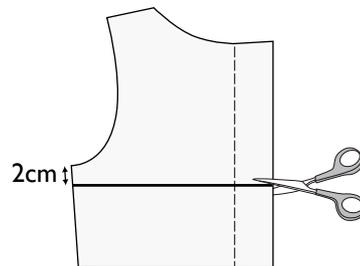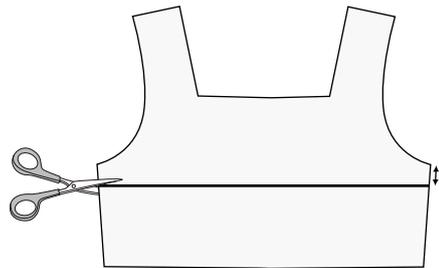

3. Shorten the front and back lower blouse panel to one third of its original length (or desired length).

Cut

Seam allowance: Refer to the sewing instructions in the pattern.

Cut all pieces from the fabric and interfacing, except the yoke pieces (you will stitch the pin tucks in the yoke piece before cutting the piece).

Cut for the pleated ruffle:

One piece 4" (10cm) x 2 1/2 times the width of front and back lower blouse panel.

Two pieces 3" (7,5 cm) x 2 1/2 times the width of sleeve.

Cut for the inserted gathered piece:


One piece 2 1/2" (6,5 cm) x double the width of front and back lower blouse panel

Cut 2 stripes 1 1/2" x 32" (4 x 80cm)

Sew

Yoke:

Before cutting the yoke, sew the pin tucks on the front and back yoke pieces: With a pictogram pen, mark the shape of the neck opening. Mark the placement of the pin tucks at each side of the neck opening. Select Stitch #1, Straight stitch. For narrow pin tucks snap on the Edge/Joining Foot and for wide pin tucks snap on the Edge Stitching Foot. Sew 3-4 pin tucks. For instructions see Accessory User's Guide.

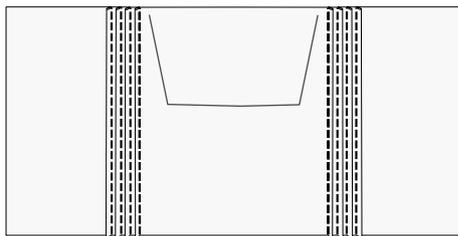


Cut out the yoke.


1. Make your own unique stitch by using the decorative tapering feature. We have used stitch 2:23 and 3:35.



2. For stitch 2:23, program 8 stitches. Choose tapering before starting to sew. Taper the stitch to the left, 45° in the beginning and end.
3. For stitch 3:35, program 4 stitches. Choose tapering before starting to sew. Taper the stitch in the center, 90° in the beginning and end. For more instructions on tapering see the User's Guide.
4. Try your stitch on a scrap piece of fabric before you start. Sew a couple of rows of tapered stitches between the pin tucks on the front yoke piece.

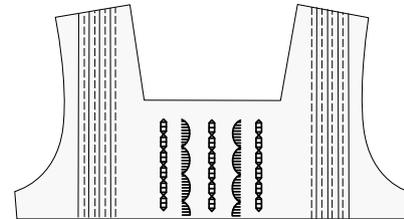

5. Sew the shoulder seams. Choose a decorative stitch. We have used stitch 3:20 and sew around the blouse neck opening see illustration.

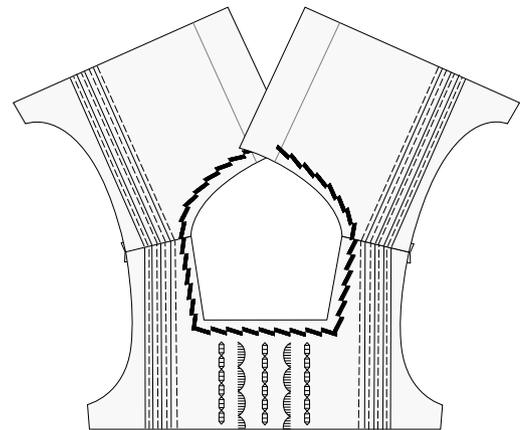


Lower Edge:

To the lower edge of the lower blouse panel, we have inserted a gathered piece, a narrow strip with a decorative stitch and a pleated ruffle. First, make all the pieces separately.



Gathered inserted piece:

Using the Gathering Foot, gather the 2 1/2" (6,5 cm) wide piece of fabric on both raw edges. For instructions on gathering, see the Accessory User's Guide.

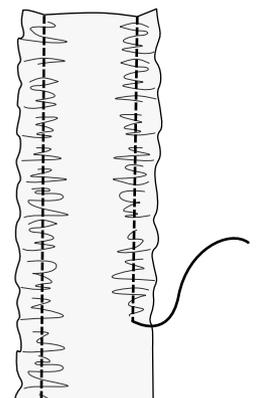

Narrow strip with decorative stitches:


Place Tear-A-Way stabilizer underneath. Sew a decorative stitch of your choice lengthwise in the center of the strip. We have used stitch 3:20.

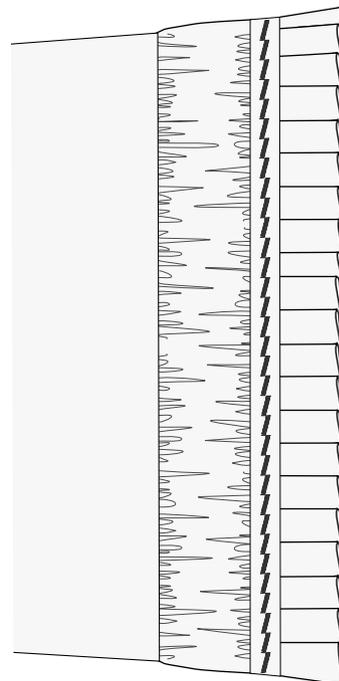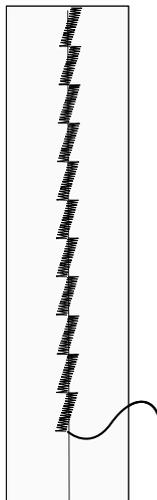

4. Follow the sewing instructions in the pattern to continue sewing the blouse.

Pleated ruffle:


1. Fold the pleated ruffle pieces in half, lengthwise and press. Attach the Ruffler. Set it at 6 for a pleat every 6th stitch. Ruffle the raw edge side of all pieces. For instructions on using the ruffler, see the Accessory User's Guide.

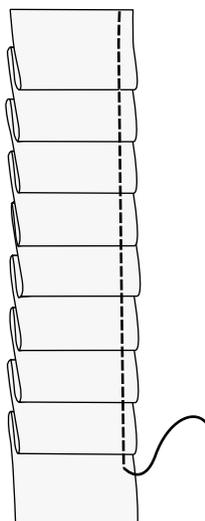

2. The shorter pleated ruffles will be used for the sleeve.
3. Sew the pieces to the lower edge. First sew the inserted gathered piece to the lower blouse. Then sew the narrow strip and then the pleated ruffle.

Sleeve:

1. Select stitch #1, adjust the stitch length to 5.0. Sew two rows of gathering stitches (a long straight stitch) along the lower edge of the sleeves. Gather the sleeve edge to the length you want. Sew the short pleated ruffles to the lower edge of the sleeves. Cover the seam with a silk ribbon.

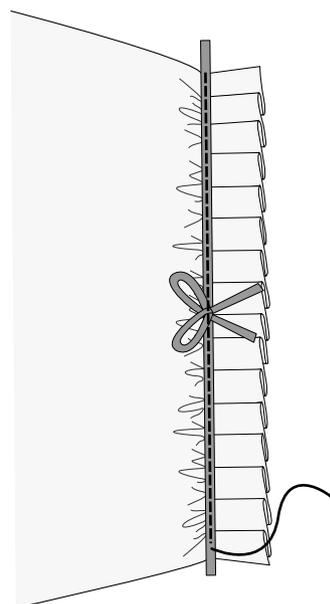

2. Follow the sewing instructions in the pattern to finish the Blouse.